


Configuration Option Sheet E Series 5-7t


Configuration	Multi Function Display	Driving/lifting/steering Computer Controlled	Pedal Rubber	Lithium Battery	Emergency Stop Switch
	Full Set of LED Lights	Reversing Buzzer	Safety seat	Full-hydraulic Power Steering	Wide view mast
	Low Resistance Tyres	Two-piece Multiplex Valve	High Efficiency AC Drive Motor	Gear Pump with Low Noise	Energy Efficient Dynamic Signal
	Load Sensing Hydraulic System	Roof Weather Canopy	Charging Indicator	Electric Horn	Backup Mirror
	Traction Pin	Tool Box	Standard Forks	Lift, Tilt, Levers	
Optional	Cabin	Cold A/C	Heater	Suspension Seat	Lifting Potentiometer
	Battery Charger	Lithium Battery	Rotating Buzzer Warning Light	Rear Working Light	Warning Light
	Solid Tyres	Non Marking Tyres	Large Capacity Battery	Tailored backrest	Widen Fork Carriage
	Protective Net	Electric Fan	Reversing Handrail Horn	Corner Positioner	Reversing Radar
	Fork Extensions	Tilt cylinder protection	Steering cylinder protection	Custom Colours	Multiple Hydraulic Attachments
	Reversing Voice Horn				

Load Curve



Note: The vertical axis represents the rated lifting weight, and the horizontal axis represents the load center distance. The load center is calculated from the front of the fork, and the base point of the standard load refers to the center position of a cube with a load side length of 1000 mm. When the mast is tilted forward, non-standard forks are used, or loads exceeding the normal width are loaded, the load capacity will be reduced. Through the load curve chart, the carrying capacity of various load centers can be understood in time.

Structure Diagram

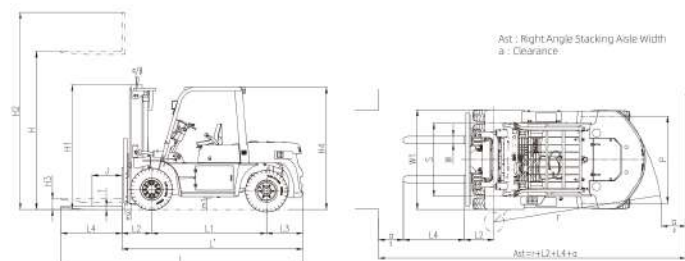

GROS

LONGKING HOLDINGS LIMITED
LONGKING (SHANGHAI) FORKLIFT SALES CO.,LTD.



Официальный дистрибьютор в России:
компания «Склад-ру»
www.sklad.ru
8-800-250-83-33

GROS



5-7t
E Series Counterbalance
Electric Forklift Truck

